

# Datasheet & Operating instructions

## Model: ET-70V12A-D3

Power supply for 12 Vac constant voltage  
6 A (70 W) max., IP20, independent installation  
TRIAC (leading & trailing edge) dimmable



### Exploded view



## Electrical data

<b>Rated Input Voltage</b>	220...240 Vac	
<b>Mains frequency</b>	50/60 Hz	
<b>Power factor (<math>\lambda</math>)</b>	$\geq 0.99$	
<b>Input current</b>	0.29 A max.	
<b>Inrush current</b>	5 A max.	
<b>Output voltage</b>	11.5 Vac	
<b>Output current</b>	6 A max.	
<b>Output power (nominal)</b>	0...50 W	12Vac LED (max. 6 pc.)
	0...70 W	12V halogen
<b>Efficiency</b>	> 95 %	
<b>Lifetime</b>	> 50,000 h	
<b>Dimming mode</b>	TRIAC (leading & trailing edge)	
<b>Dimming range</b>	1...100 %	

## Operating condition

<b>Operating temperature range (<math>t_a</math>)</b>	-20...+50 °C	
<b>Max. Surface temperature (<math>t_c</math>)</b>	80 °C	
<b>Permitted rel. humidity</b>	5...85 %	
<b>Protection class</b>	II	
<b>Type of protection</b>	IP20	

## Protection

<b>Short circuit protection</b>	Yes *	
<b>Overload protection</b>	Yes *	
<b>Overvoltage protection</b>	Yes *	
<b>Overheating protection</b>	Yes *	

(\*) The output shuts off and will be resumed, after problem is removed and led driver is restarted.


## Standards

<b>Standards</b>	EN 61347-1, EN 61347-2-2 EN 62493, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3	
<b>Marking</b>	CE, UKCA	
<b>RoHS compliant</b>	Yes	


## Installation

<b>Type of installation</b>	Independent installation	
<b>Type of connection</b>	Screw terminal	
<b>Cable cross-section, input side</b>	0.75...2.5 mm <sup>2</sup>	
<b>Cable cross-section, output side</b>	0.75...2.5 mm <sup>2</sup>	
<b>Cable preparation length, input side</b>	8 mm	
<b>Cable preparation length, output side</b>	8 mm	
<b>Circuit breaker (230V)</b>	10A Type B: 34 pc. 13A Type B: 44 pc. 16A Type B: 55 pc. 20A Type B: 68 pc.	10A Type C: 34 pc. 13A Type C: 44 pc. 16A Type C: 55 pc. 20A Type C: 68 pc.

## Dimension

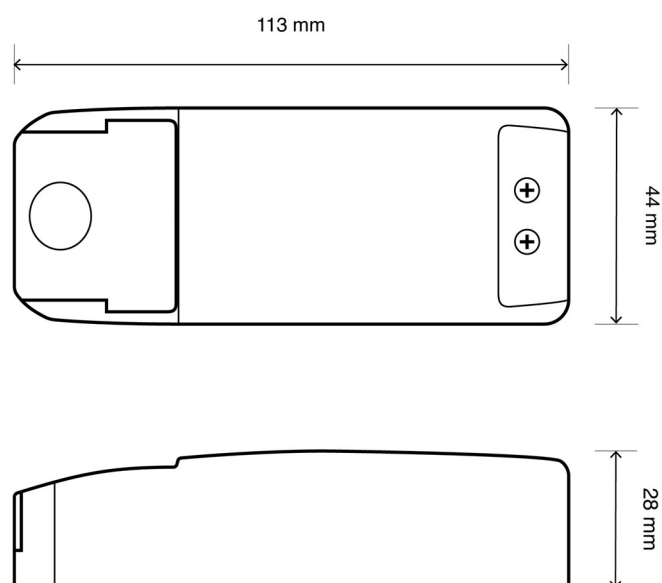

## Connection

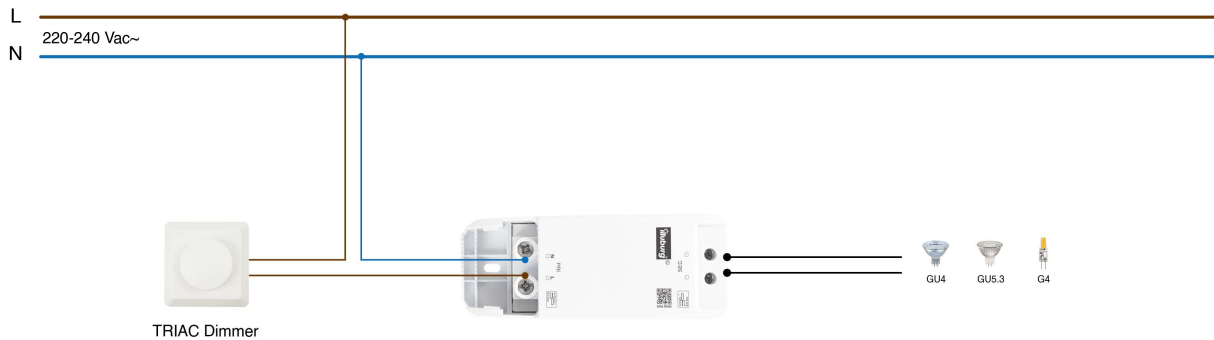

## Important notice

Download the safety instructions at [www.illuburg.de/infocenter](http://www.illuburg.de/infocenter), read them carefully and observe the listed instructions and information for proper use.

## Disclaimer of liability

Subject to changes and errors excepted. Make sure you are using the latest version.

## Manufacturer Information

If you have any further questions, please contact our technical support.

HuaTec GmbH  
Droopweg 31  
20537, Hamburg, Germany

Telefon: +49 40 236448800  
E-Mail: [info@illuburg.de](mailto:info@illuburg.de)  
Website: [www.illuburg.de](http://www.illuburg.de)

