

Datasheet & Operating instructions

Model: SS-6V12

LED power supply for 12 Vdc constant voltage
0.5 A (6 W) max., IP20, Built-in installation, non-dimmable
Flicker free according to IEEE 1789



Electrical data

Rated input voltage	220...240 Vac	
Range of input voltage	198...264 Vac	
Range of input voltage (DC)	176...280 Vdc	
Mains Frequency	50/60 Hz	
Power factor (λ)	≥ 0.75 C	Full Load, 230 Vac
Input current	0.08 A max.	Full Load, 198 Vac
No-load loss	≤ 0.5 W	
Inrush current	10 A max.	
Leakage current	< 0.7 mA	
Output voltage	12 Vdc	
Output current	0...0.5 A	
Output power (nominal)	6 W max.	
Efficiency	≥ 75 %	
Life time	$> 50,000$ h	
Dimmable	No	

Operating condition

Operating temperature range (t_a)	-20...+45 °C	
Max. Surface temperature (t_c)	80 °C	
Permitted rel. humidity during operation	20...90 %	
Protection class	II	
Type of protection	IP20	

Protection

Short circuit protection	Yes *	
Overload protection	Yes *	105...150 %
Overvoltage protection	Yes *	> 12.6 Vdc
Overheating protection	Yes *	

(*) The output shuts off and will be resumed, after problem is removed and led driver is restarted.

Standards

Standards	EN 61347-1, EN 61347-2-13 EN 62384, EN 55015, EN 61547 EN 61000-3-2, EN 61000-3-3	
Marking	CE, UKCA	
RoHS compliant	Yes	




Installation

Cable length, input side	150 ± 5 mm	
Cable length, output side	110 ± 5 mm	
Cable cross-section, input side	2 x 0.5 mm ² (20 AWG)	
Cable cross-section, output side	2 x 0.34 mm ² (22 AWG)	
Cable preparation length, input side	6 mm tinned	
Cable preparation length, output side	6 mm tinned	
Circuit breaker (230V)	10A Typ B: 100 pc. 16A Typ B: 160 pc. 20A Typ B: 200 pc.	10A Typ C: 100 pc. 16A Typ C: 160 pc. 20A Typ C: 200 pc.

Dimension


AC INPUT (2 x 0.5 MM²)
BROWN (L)
BLUE (N)

DC OUTPUT (2 x 0.34 MM²)
RED (+)
BLACK (-)

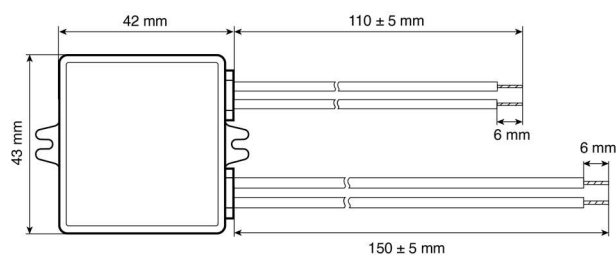

Unspecified tolerance: ±2

Connection

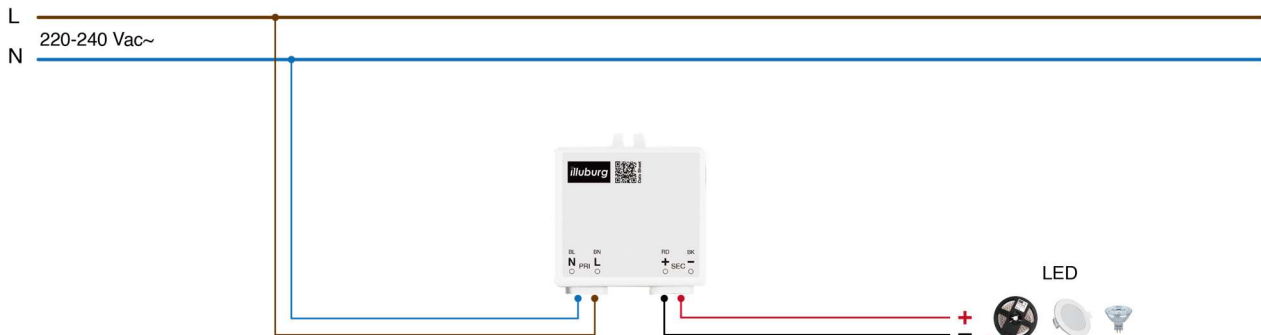

Important notice

Download the safety instructions at www.illuburg.de/infocenter, read them carefully and observe the listed instructions and information for proper use.

Disclaimer of liability

Subject to changes and errors excepted. Make sure you are using the latest version.

Manufacturer Information

If you have any further questions, please contact our technical support.

HuaTec GmbH
Droopweg 31
20537, Hamburg, Germany

Telefon: +49 40 236448800
E-Mail: info@illuburg.de
Website: www.illuburg.de

