


# Datasheet & Operating instructions

## Model: UF4-60V12

LED power supply for 12 Vdc constant voltage

5 A (60 W) max., IP44, independent installation, non-dimmable



## Electrical data

Rated input voltage	220...240 Vac
Range of input voltage	198...264 Vac
Mains frequency	50/60 Hz
Power factor ( $\lambda$ )	$\geq 0,95$
Input current	0,37 A max.
No-load loss	$\leq 0,5$ W
Output voltage	12 Vdc
Output current	0...5 A
Output power (nominal)	60 W max.
Efficiency	$\geq 87$ %
Life time	> 30.000 h
Dimmable	No

## Operating condition

Operating temperature range ( $t_a$ )	-20...+45 °C
Max. Surface temperature ( $t_c$ )	85 °C
Permitted rel. humidity	10...90 %
Protection class	II
Type of protection	IP44

## Protection

Short circuit protection	Yes *
Overvoltage protection	Yes *
Overload protection	Yes *
Overheating protection	Yes *

(\*) The output shuts off and will be resumed, after problem is removed and led driver is restarted.

## Standards

Standards	EN 61347-1, EN 61347-2-13 EN 62493, EN 55015, EN 61547 EN 61000-3-2, EN 61000-3-3
Marking	CE, UKCA
RoHS compliant	Yes


## Installation

Type of installation	Independent installation
Cable length, input side	250 ± 10 mm
Cable length, output side	250 ± 10 mm
Cable cross-section, input side	2 x 1.0 mm <sup>2</sup>
Cable cross-section, output side	2 x 0.75 mm <sup>2</sup>
Cable preparation length, input side	7 mm tinned
Cable preparation length, output side	7 mm tinned

## Dimension


AC INPUT (2 x 1.0 MM<sup>2</sup>)  
 BROWN (L)  
 BLUE (N)

DC OUTPUT (2 x 0.75 MM<sup>2</sup>)  
 RED (+)  
 BLACK (-)

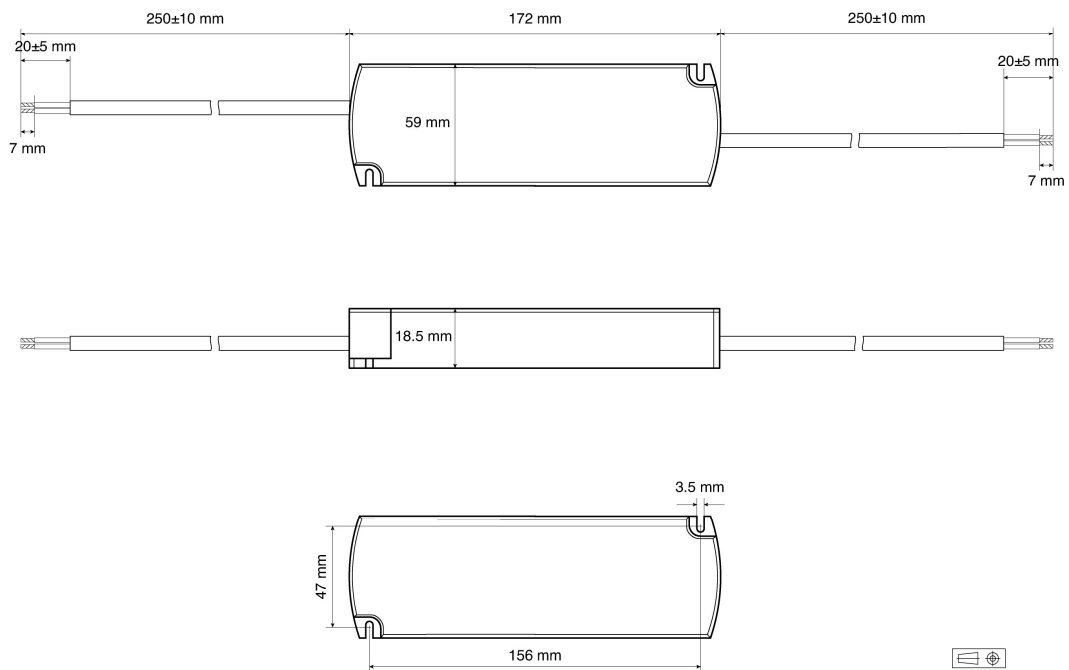

Unspecified tolerance: ±2

## Connection

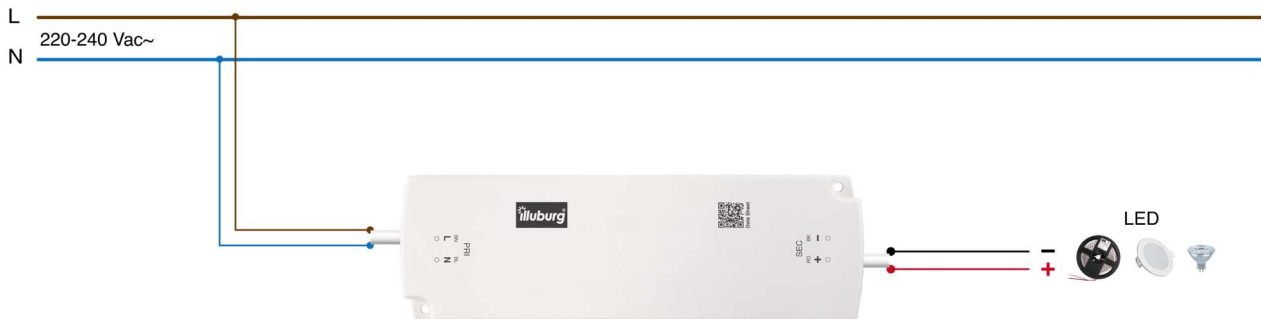

## Important notice

Download the safety instructions at [www.illuburg.de/infocenter](http://www.illuburg.de/infocenter), read them carefully and observe the listed instructions and information for proper use.

## Disclaimer of liability

Subject to changes and errors excepted. Make sure you are using the latest version.

## Manufacturer Information

If you have any further questions, please contact our technical support.

HuaTec GmbH  
Droopweg 31  
20537, Hamburg, Germany

Telefon: +49 40 236448800  
E-Mail: [info@illuburg.de](mailto:info@illuburg.de)  
Website: [www.illuburg.de](http://www.illuburg.de)

