
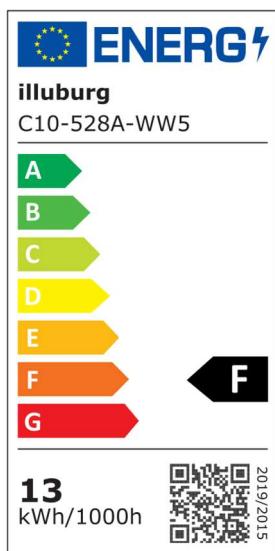



# Datasheet & Operating instructions

Model: C10-528A-WW

Flexible COB LED Strip in 2.5 m, 5 m configuration  
528 LEDs/m, 93 lm/W, 14 W/m, 12 Vdc, 2700 K

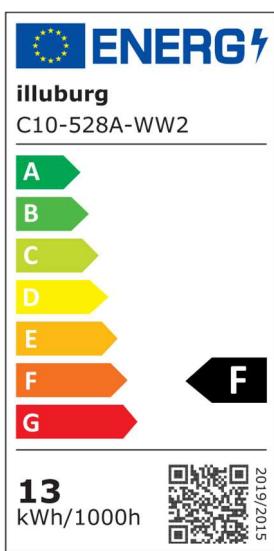


## Dimming Effect

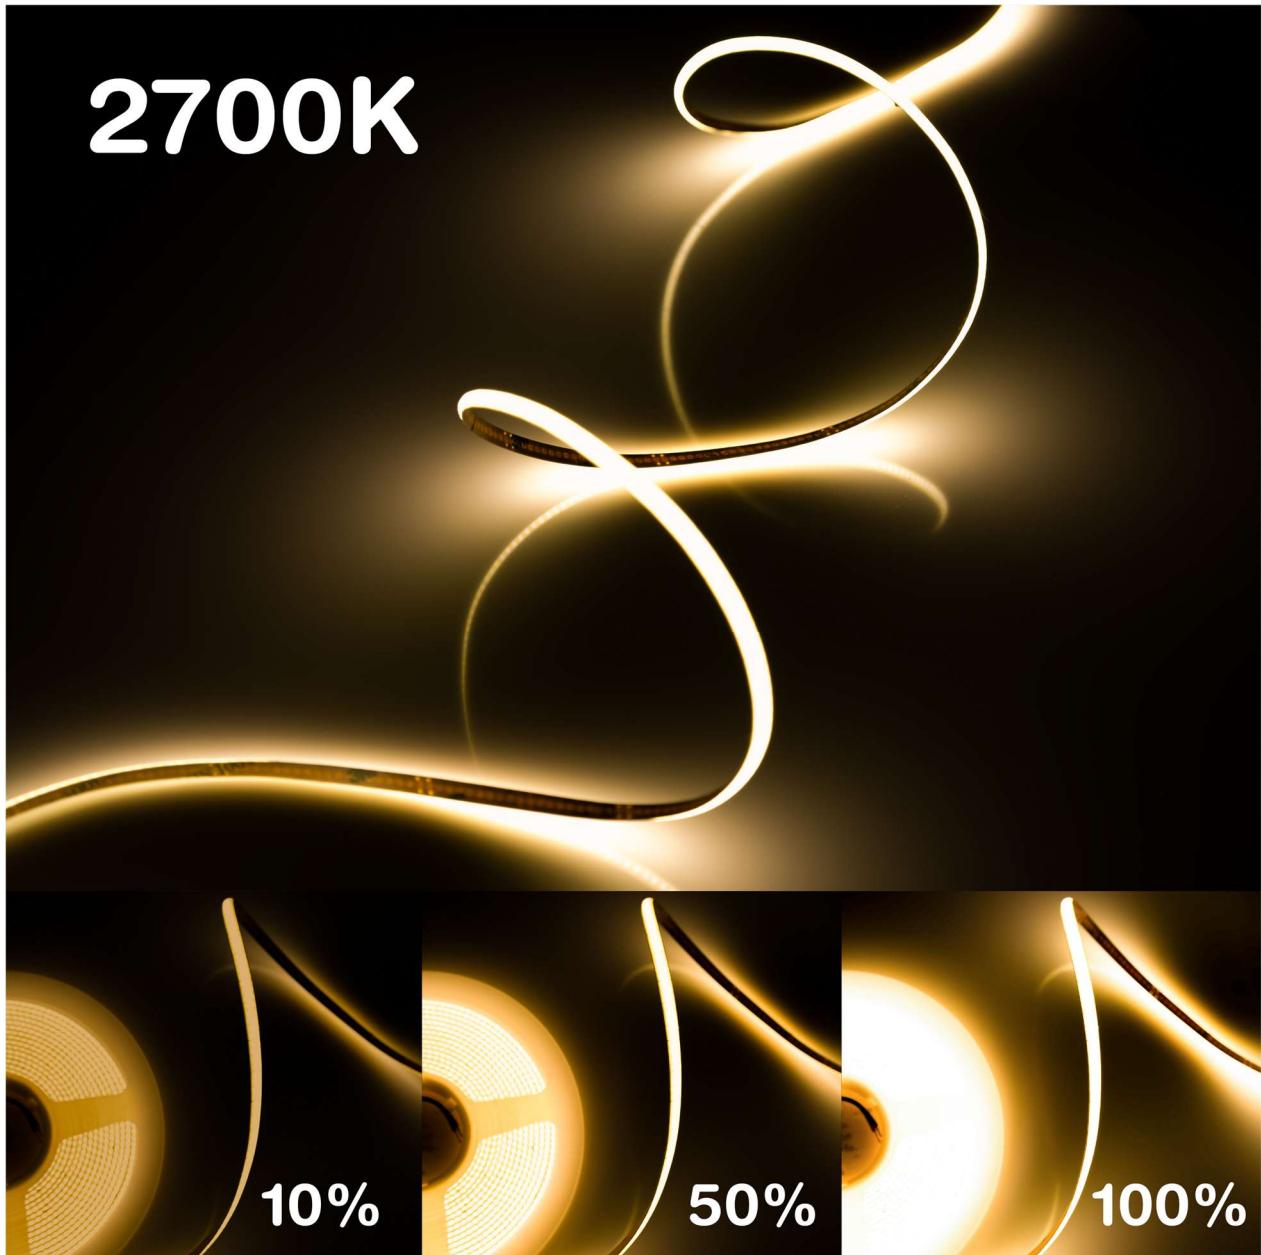

## Technical Data







Model	C10-528A-WW2 C10-528A-WW5	
LED type	COB	
Operating voltage	12 Vdc	
LED quantity	528 LEDs/m	C10-528A-WW2: 1,320 LEDs C10-528A-WW5: 2,640 LEDs
Power	14 W/m	
Efficiency	93 lm/W	
Light flux	1,302 lm/m	
CRI	≥ 90 Ra	
Efficiency Class	F	
Color temperature	2700 K	
Length	C10-528A-WW2: 2.5 m C10-528A-WW5: 5 m	
Width	10 mm	
Height	1.8 mm	
Life time	50,000 h	
Protection type	IP20	
CE / RoHS	yes	

## Dimension

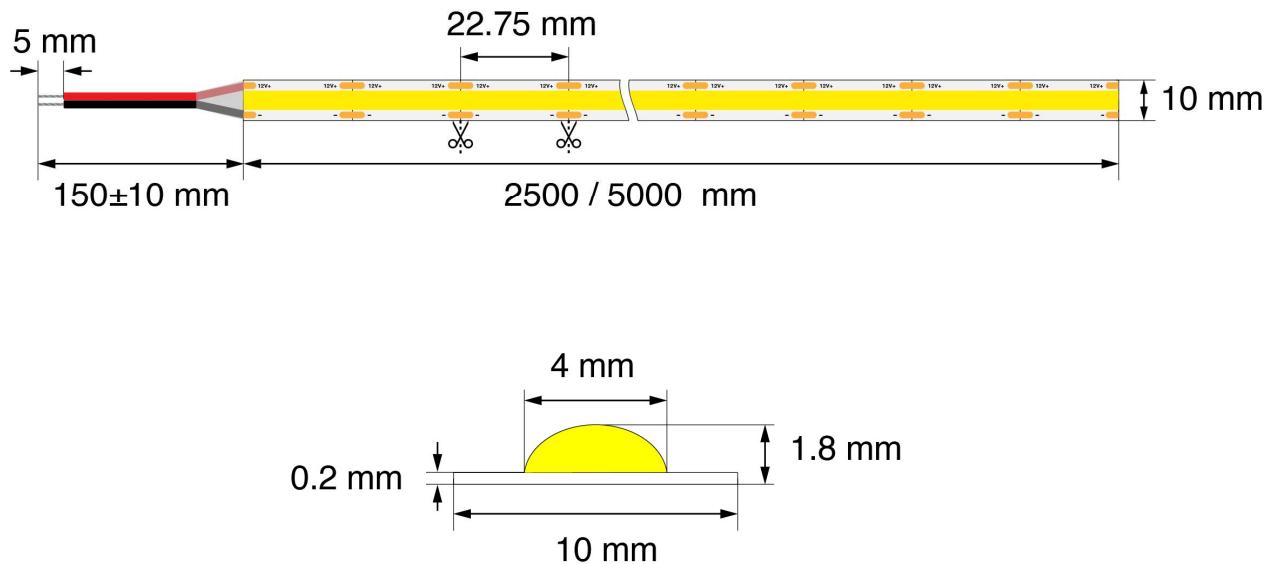

The LED strips can be easily separated or shortened at the intersection using the cutter. There is double-sided heat-conducting adhesive tape on the back of the LED strips, which makes installation quick and easy.

## Connection Instructions

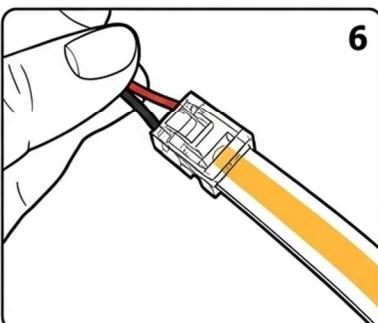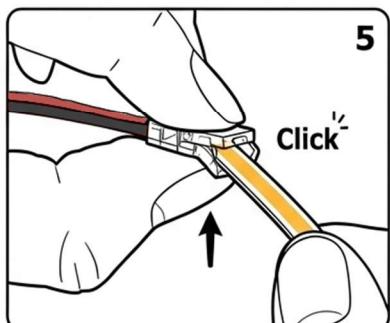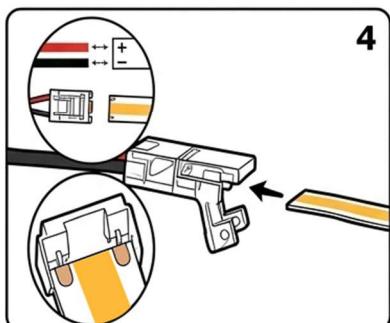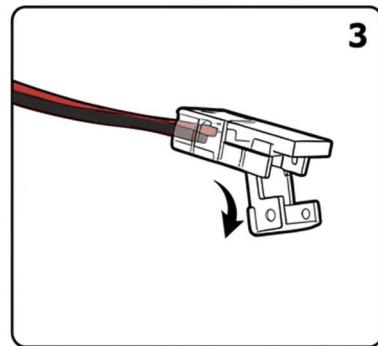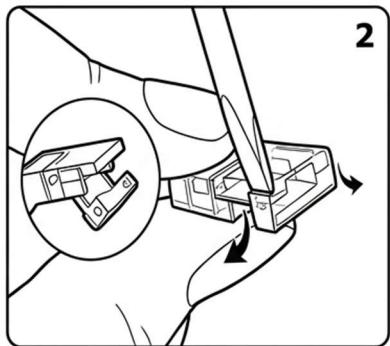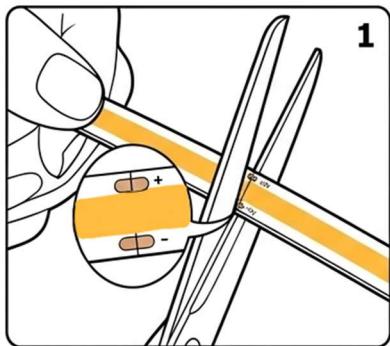

The original LED strip has a cable connection on one side. After shortening the LED strips, a new connection can be made through a connector provided for this purpose.

## Important notice

Download the safety instructions at [www.illuburg.de/infocenter](http://www.illuburg.de/infocenter), read them carefully and observe the listed instructions and information for proper use.

## Disclaimer of liability

Subject to changes and errors excepted. Make sure you are using the latest version.

## Manufacturer Information

If you have any further questions, please contact our technical support.

HuaTec GmbH

Telefon: +49 40 236448800



Droopweg 31

E-Mail: [info@illuburg.de](mailto:info@illuburg.de)

20537, Hamburg, Germany

Website: [www.illuburg.de](http://www.illuburg.de)

[www.illuburg.de](http://www.illuburg.de)