
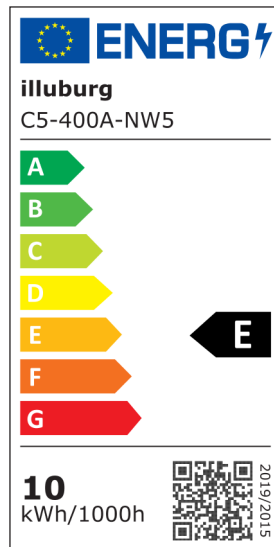


Datasheet & Operating instructions

Model: C5-400A-NW



Flexible COB LED Strip in 2.5 m, 5 m configuration
400 LEDs/m, 99 lm/W, 10 W/m, 12 Vdc, 4000K

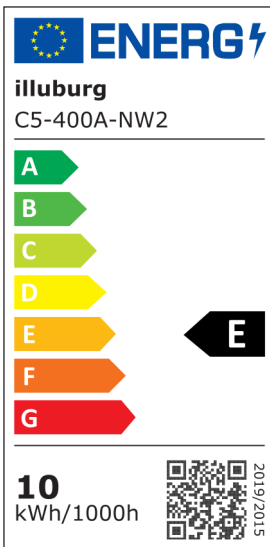

Technical Data

Model	C5-400A-NW2 C5-400A-NW5	
LED type	COB	
Operating voltage	12 Vdc	
LED quantity	400 LEDs/m	C5-400A-NW2: 1,000 LEDs C5-400A-NW5: 2,000 LEDs
Power	10 W/m	
Efficiency	99 lm/W	
Light flux	990 lm/m	
CRI	≥ 90 Ra	
Efficiency Class	E	
Color temperature	4000K	
Length	C5-400A-NW2: 2.5 m C5-400A-NW5: 5 m	
Width	5 mm	
Hight	1.5 mm	
Life time	50,000 h	
Working environment	-20 °C ... +45 °C	
Storage environment	-30 °C ... +80 °C	
Protection type	IP20	
CE / RoHS	yes	


Dimension

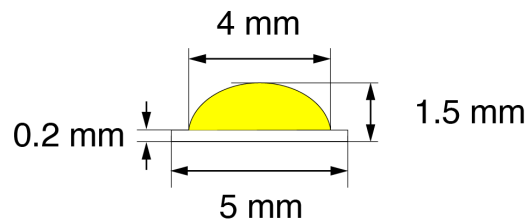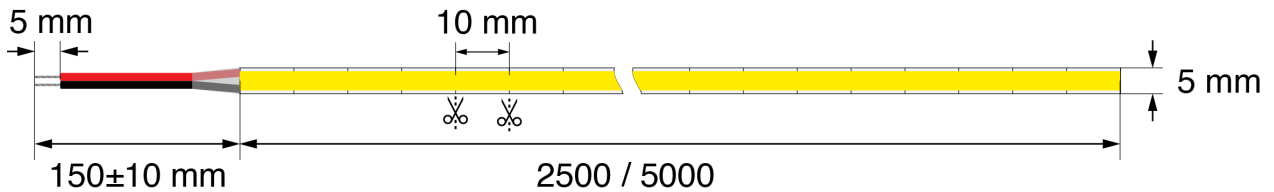


The LED strips can be easily cut to length at the designated cutting points. Each strip features a double-sided, thermally conductive adhesive tape on the back, allowing for quick and simple installation

Connection Instructions


Board-to-Wire Connector (2 Pin)



Tools



Scissors



Pliers

1 Measure & Cut


2 Polarity & Alignment

3 Insert the LED Strip


4 Press to Secure

5 Finish


Board-to-Board Connector (2 Pin)



Tools



Scissors



Pliers

1 Measure & Cut

2 Polarity & Alignment

3 Insert the LED Strip

4 Press to Secure

5 Finish



Important notice

Download the safety instructions at www.illuburg.de/infocenter, read them carefully and observe the listed instructions and information for proper use.

Disclaimer of liability

Subject to changes and errors excepted. Make sure you are using the latest version.

Manufacturer Information

If you have any further questions, please contact our technical support.

HuaTec GmbH
Droopweg 31
20537, Hamburg, Germany

Telefon: +49 40 236448800
E-Mail: info@illuburg.de
Website: www.illuburg.de

