
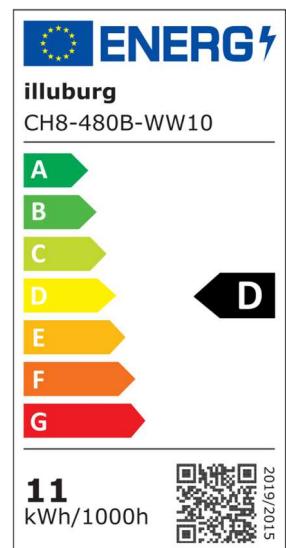
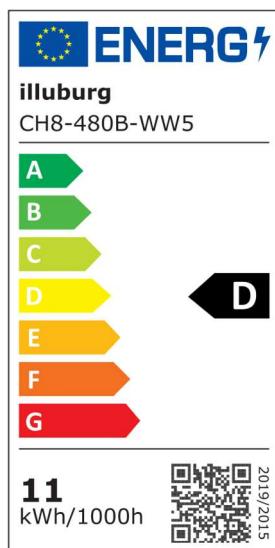



Datasheet & Operating instructions

Model: CH8-480B-WW

Flexible COB LED Strip 2.5 m, 5 m, 10 m Roll
480 LEDs/m, 135 lm/W, 11 W/m, 24 Vdc, 3000 K

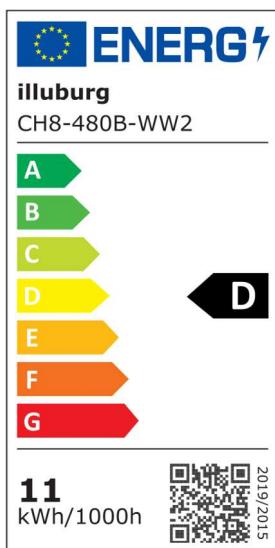



Dimming Effect

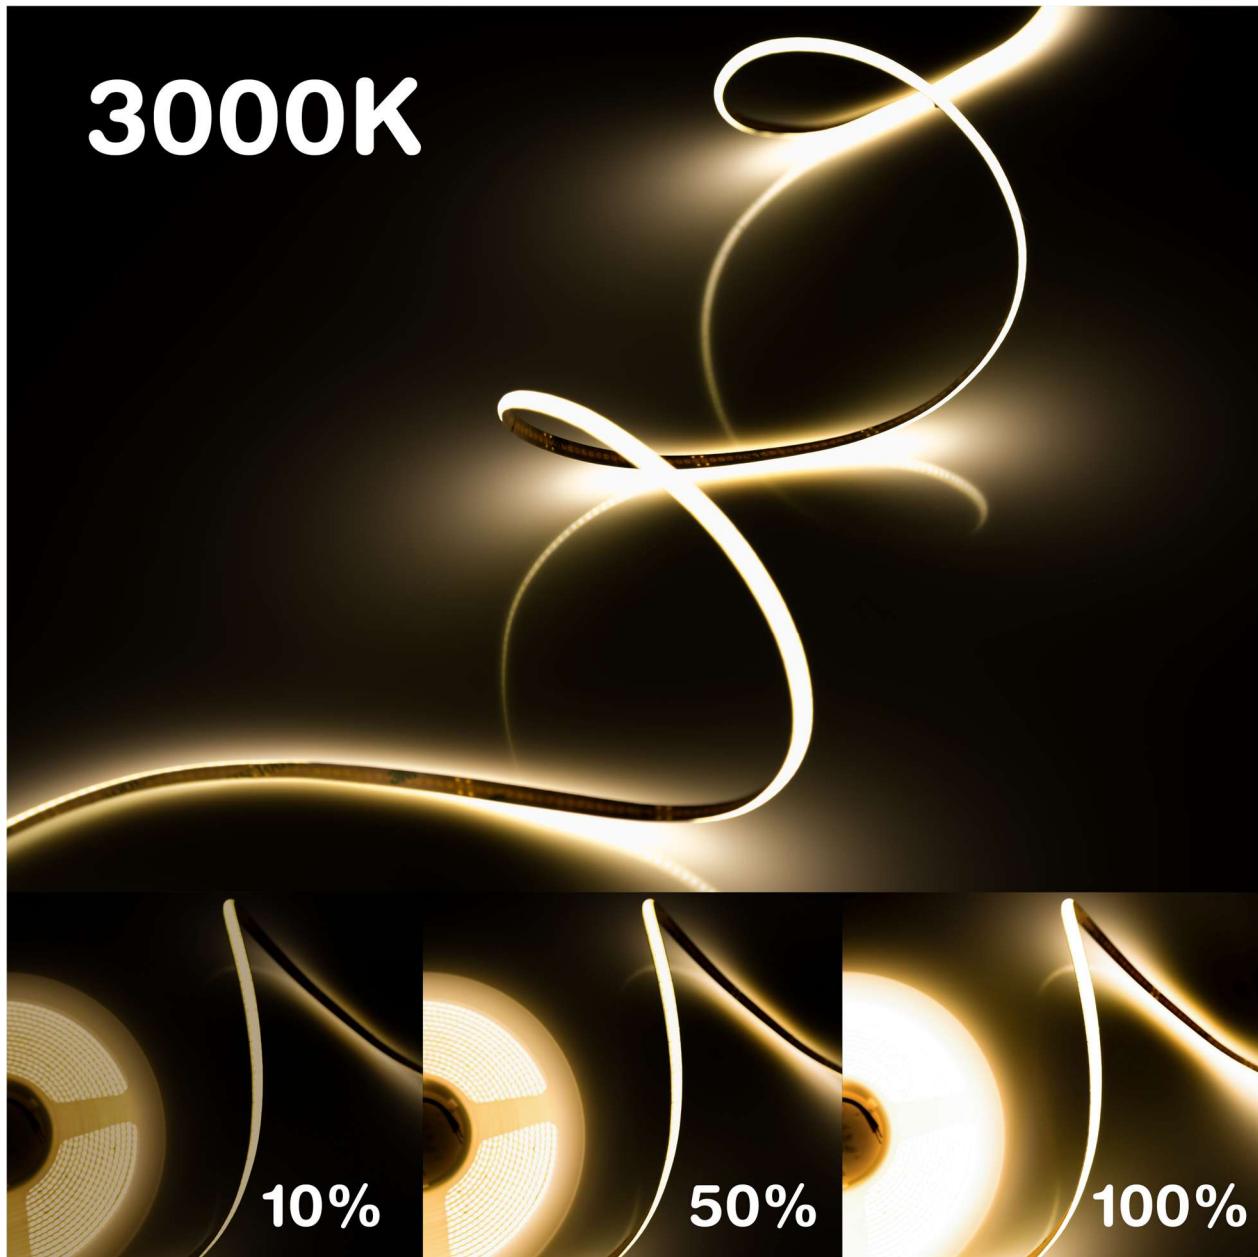

Technical Data







Model	CH8-480B-WW2 CH8-480B-WW5 CH8-480B-WW10	
LED type	COB	
Operating voltage	24 Vdc	
LED quantity	480 LEDs/m	CH8-480B-WW2: 1,200 LEDs CH8-480B-WW5: 2,400 LEDs CH8-480B-WW10: 4,800 LEDs
Power	11 W/m	
Efficiency	135 lm/W	
Light flux	1,485 lm/m	
Efficiency Class	D	
CRI	91 Ra	
Color temperature	3000 K	
Length	CH8-480B-WW2: 2.5 m CH8-480B-WW5: 5 m CH8-480B-WW10: 10 m	
Width	8 mm	
Height	1.5 mm	
Life time	50,000 h	
Working environment	-20 °C ... +45 °C	
Storage environment	-30 °C ... +80 °C	
Protection type	IP20	
CE / RoHS	yes	

Dimension

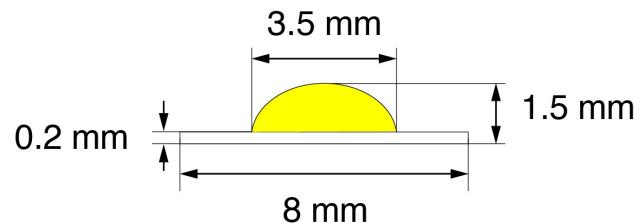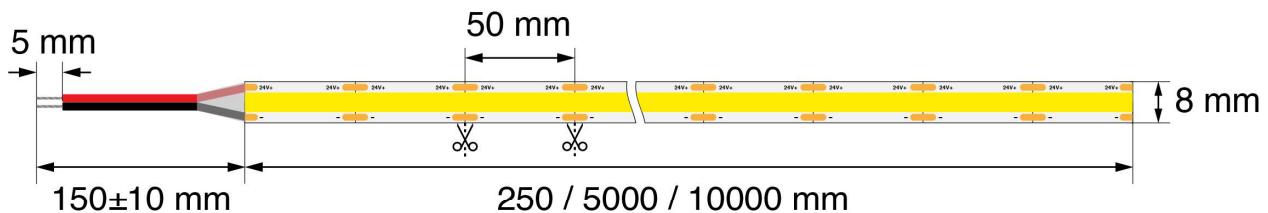

The LED strips can be easily separated or shortened at the intersection using the cutter. There is double-sided heat-conducting adhesive tape on the back of the LED strips, which makes installation quick and easy.

Connection Instructions

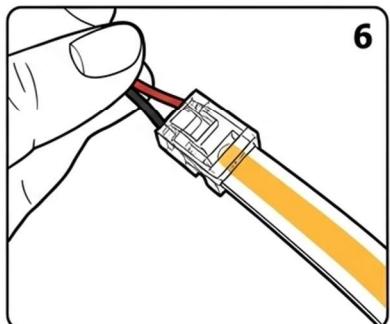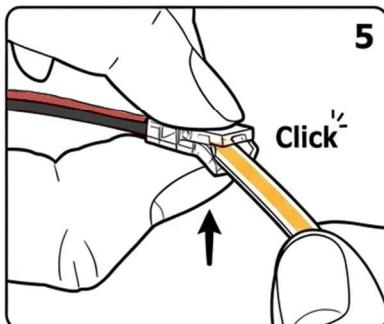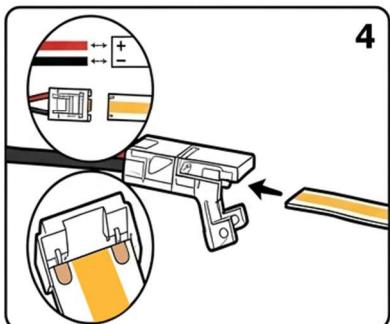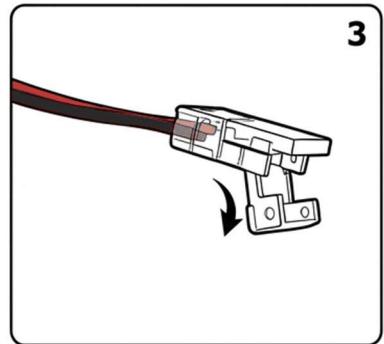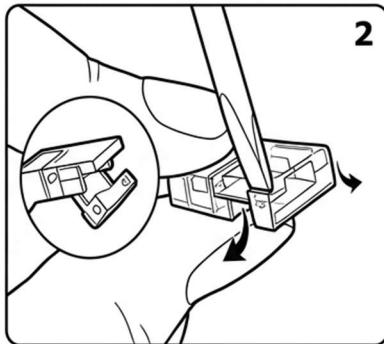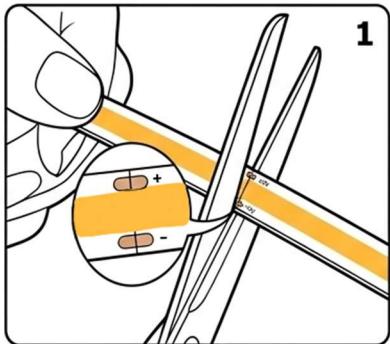

The original LED strip has a cable connection on one side. After shortening the LED strips, a new connection can be made through a connector provided for this purpose.

Important notice

Download the safety instructions at www.illuburg.de/infocenter, read them carefully and observe the listed instructions and information for proper use.

Disclaimer of liability

Subject to changes and errors excepted. Make sure you are using the latest version.

Manufacturer Information

If you have any further questions, please contact our technical support.

HuaTec GmbH

Telefon: +49 40 236448800



Droopweg 31

E-Mail: info@illuburg.de

20537, Hamburg, Germany

Website: www.illuburg.de

www.illuburg.de